



600-LED-TB-MC

© EBELCO COPYRIGHT 2019.

FEATURES :



- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Selectable Re-locking Timer 5,10,15, 25 Sec
- ✓ Built-in EXIT Push Switch Terminal
- ✓ Low Current Consumption
- ✓ Reliable Holding Force
- ✓ Hall Effect Sensor Monitoring Output
- ✓ Green/Red LED Indication for EM Lock Status
- ✓ Built-in Mag.Contact for Door Status Monitoring
- ✓ Durable & Silence Operation
- ✓ Cosmetic Anodized Aluminum Casing
- ✓ Surge & Spike Protection PCB
- ✓ Anti-Tamper Jam Nuts
- ✓ Full Range of Optional Brackets
- ✓ Anti Residual Magnetism Kick Off Button

SPECIFICATIONS :

- 1 **Voltage Input :** 12 VDC / 24 VDC
- 2 **Current Draw :** 12V@510mA ; 24V@285mA (±5%)
- 3 **Holding Force :** Up to 600 lbs (272 kg)
- 4 **Hall Effect Contact :** SPDT rated 1A at 24 VDC
- 5 **Magnetic Contact Rating :** 40 VDC, 0.25A, 10W
- 6 **Anti-Rust Surface Treatment :** Blue Zinc Plating
- 7 **Operating Temperature :** 0~55° C (32~131° F)
- 8 **Operating Humidity :** 0~95% (non condensing)
- 9 **Weight :** 1.90 kg (±1%)
- 10 **Dimensions :** Magnet - (L)250x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm

EBELCO electromagnetic lock 600 series are known with its excellent holding force and remarkable features.

The series compliance to **UL, CE** and **PSB Test** are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

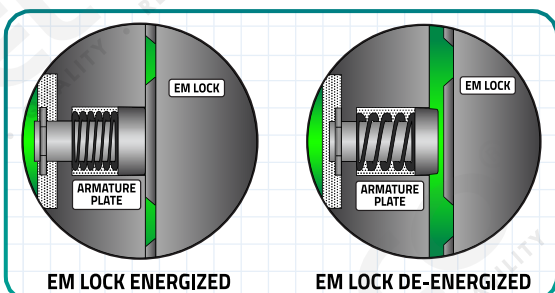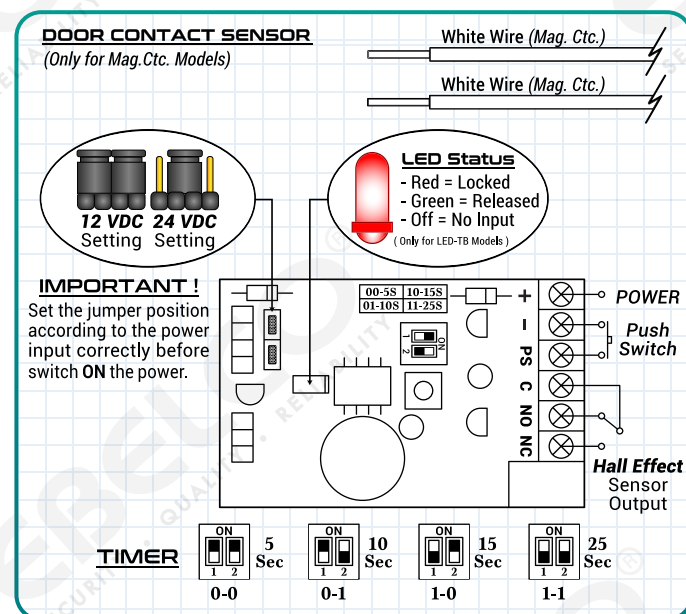

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

CE c RoHS

